



DIGITAL DIFFERENTIAL BLOOD CELL COUNTER

DBC-9D & DBC-9DM

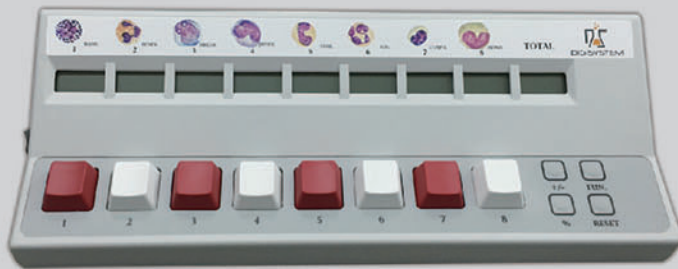

DBC-9D

- Digisystem Digital Blood Cell Counter DBC-9D & DBC-9D-M use microprocessor controlled system which offers accurate and simple counts.
- 8 buttons have red and white colors in sequence for identification.
- Each button has a 3-digit LCD window. One 3-digit LCD window is for the total amount.
- Cell pictures for BASO, EOSIN, MYELO, JUVEN., STAB., SEG., LYMPH., MONO, are labeled.
- A click sound on each touch to confirm the count.
- At one hundred increment of the total amount, a short beep sound is heard.
- Push the percent (%) button to calculate percentages, and push the reset button to clear the counts.
- Push the +/- button can increase or decrease the counts. Push the function (FUN.) button to adjust the contrast and to monitor the battery energy.
- The model DBC-9D-M has two extra functions which can use a RS232 connector to connect with a printer and can use a SD card to save data. Push the function (FUN.) button also can display the date.
- The power supply can be 100~240V or 2 pcs of AA battery.
- Quality certification: ISO 9001, ISO 13485

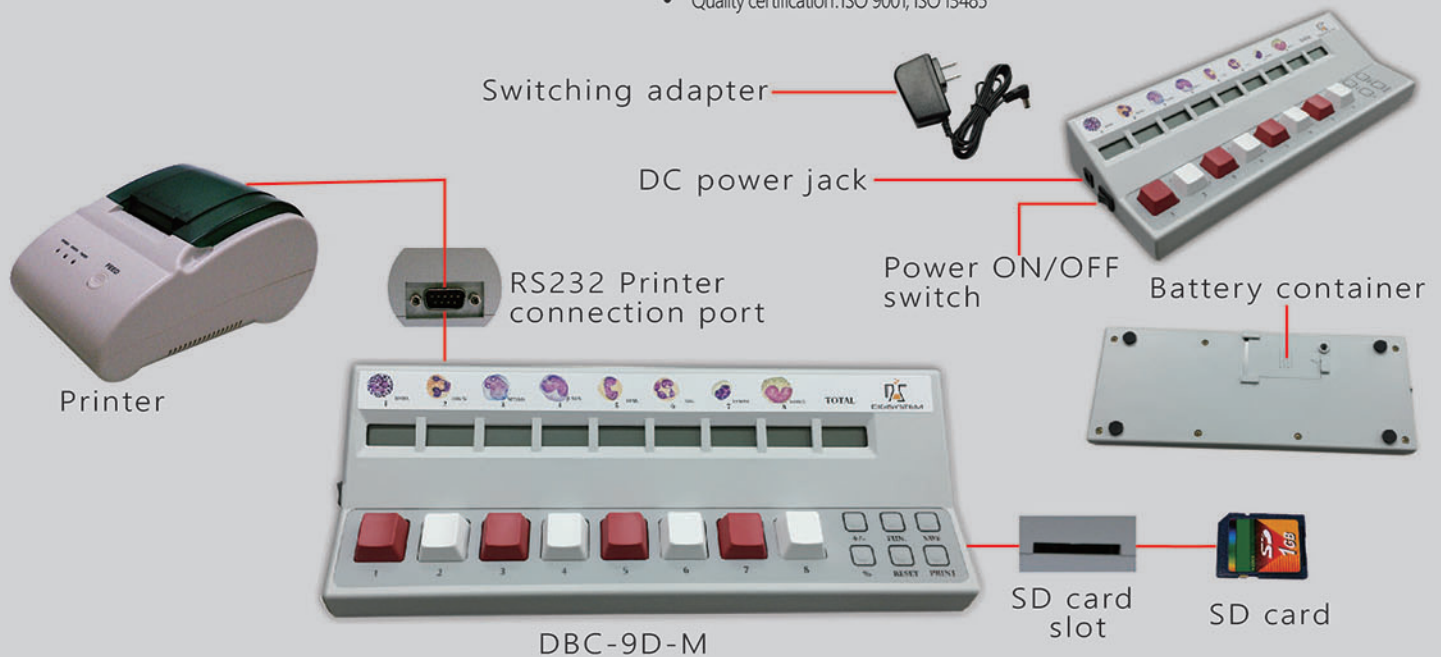

Specifications:

Model	DBC-9D	DBC-9D-M
Number of button	8 buttons	
Number of window	9 x 3-digit LCD window (including one window for total amount)	
Function button	4 function buttons (+/-, %, RESET, FUN.)	6 function buttons (+/-, %, RESET, FUN., PRINT, SAVE)
Standard accessory	3.3V 1.2A switching adapter	
Optimal accessory	None	58mm receipt printer

Power supply: 100~240V 50/60Hz / 2 pcs of AA battery (Note: batteries and SD card are not supplied)

No.1, Lane 393, Fu De 1 Road, Xizhi Dist, New Taipei City 22149, Taiwan
 T: 886-2-26942339. 26945547. 26941738 F: 886-2-26941695
 ✉ digilab@ms23.hinet.net www.digisystemlab.com

We reserve the rights to change the specifications without notice.